



Akustik

DAMPA Lay-In type AL-15, nedhængt 300 mm

Frekvens Hz	Absorption α_s
125	0,57
160	0,87
200	0,58
250	0,74
315	0,71
400	0,74
500	0,89
630	0,69
800	0,58
1000	0,71
1250	0,64
1600	0,68
2000	0,72
2500	0,75
3150	0,67
4000	0,69

NRC: 0,70

Perforation: AL-15, 1,8 mm hulstørrelse.
 Åbent areal: ca. 21%.
 Indlæg: 0,2 mm akustikfilt.

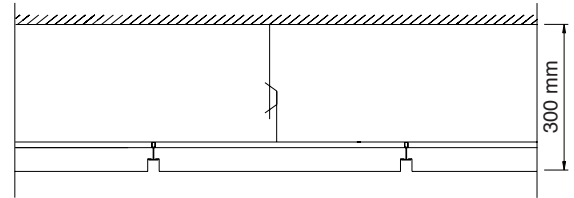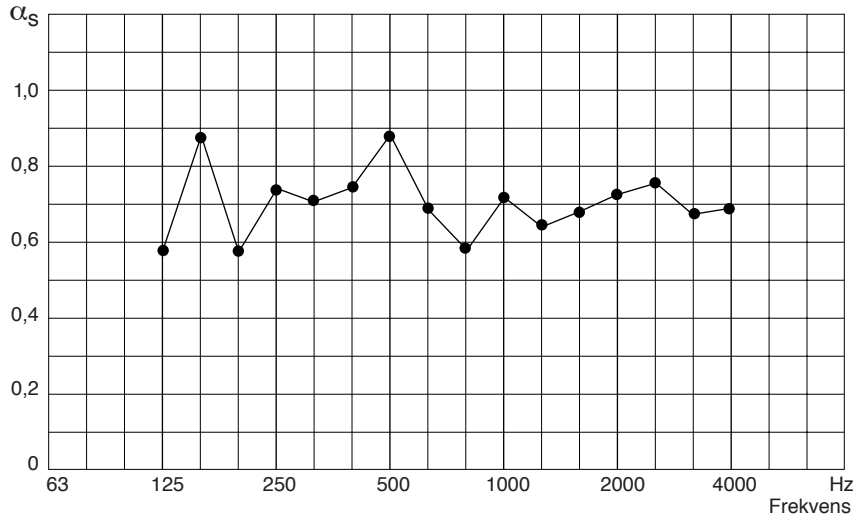

DAMPA Lay-In type ST-15, nedhængt 300 mm

Frekvens Hz	Absorption α_s
125	0,61
160	0,50
200	0,55
250	0,75
315	0,67
400	0,79
500	0,92
630	0,68
800	0,60
1000	0,73
1250	0,65
1600	0,67
2000	0,72
2500	0,73
3150	0,59
4000	0,59

NRC: 0,71

Perforation: ST-15, 1,8 mm hulstørrelse.
 Åbent areal: ca. 21%.
 Indlæg: 0,2 mm akustikfilt

